

# API 607 / API 608 Ball Valves

Manufacture as per API 591 upon request

## Typical Application :

Oil & Gas - Petrochemical – Chemical – Paraffin/Kerosene –  
Emergency Cut-Off - General Industrial



**Size : 1/4"~2 1/2"**

**Full Bore / Reduced Bore**

• API 607 6<sup>th</sup> Edition Fire Test Approved

• API 608 Compliant Valve


• Blow out proof Stem & anti-static design

• A wide range of body material available including  
Monel 400, CN7M, CW12MW, M35-1, CE3MN,  
CD3MN, SS904L, Stainless Steel and Carbon Steel

• Integral ISO 5211 Mounting pad simplify fit and  
alignment for bracketry and actuator

• Floating Ball Design

• Lockable handle in open and close  
position to prevent inadvertent  
operation

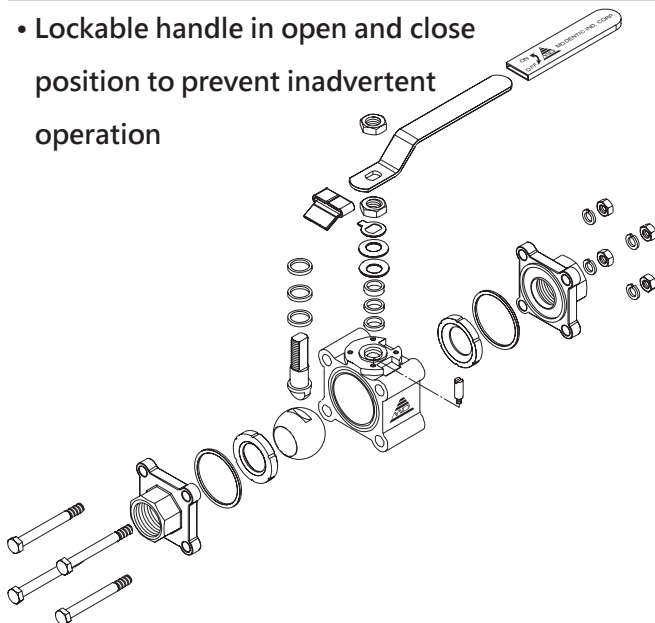

## V-255FS

## 3-PIECE FIRE SAFE APPROVED INVESTMENT CAST BALL VALVE

- A variety of seat materials are available for choice including PTFE, RTFE (PTFE with 15% G.F.), PTFE with 50% SS316, Carbon filled PTFE, and TFM. Stem packing and body seals are die formed flexible graphite.
- Design as per ASME B16.34 Class 600
- API 598 , EN12266-1 and MSS SP-55 testing and inspection
- Manufacture as per API 591 upon request
- NACE MR 0175 upon request
- A wide choice of End Connection are available including Threaded End, Socket Weld End, Butt Weld End
- Working pressure (CWP) :  
2000 psi (PN140) / 1500 psi (PN100)
- In compliance with ATEX 94/9/EC :  
ATEX II 2 GD (zones 1 & 21) and  
ATEX III 3 GD (zones 2 & 22)

**MODENTIC VALVES**  
MODENTIC INDUSTRIAL CORPORATION



<http://www.ValveBus.com>



[www.valvebus.com](http://www.valvebus.com)