



Three Piece Screwed Fire Safe Approved Ball Valve, Reduced Bore, PN140 / 100 / 63

Fig no. V-155FS Reduced Bore
1/2" ~ 4" DN 15 - DN 105



Features :

API 607 6th / ISO 10497-5 / BS 6755 Part II Fire Safe Approved

- Investment Casting Component
- Blow out proof stem, Anti-static Device,
- In-line Maintenance
- For Chemical, Industrial Application
- Carbon Steel or Super Alloy upon request

Standard Compliance :






- Body wall thickness : EN 12516-1/2/3
- Threaded end : BS 21 (BSP)
- BSPT
- ISO 228-1G
- DIN 2999
- ISO 7-1Rp
- Butt Weld : B16.25
- Socket Weld : B16.11
- Face to Face : MD's standard
- Body Material : EN1503-1
- Pressure testing : EN 12266

Specification :

- End connection : Threaded end, Socket weld end, Butt weld end
- Working Pressure : 140 Bar (CWP) / 2000 PSI for DN15 - 25
- 100 Bar (CWP) / 1500 PSI for DN32 - 65
- 63 Bar (CWP) / 1000 PSI for DN80 - 105
- Temperature : -20 to 180°C

MATERIAL LIST

NO.	PART NAME	MATERIAL
1	BODY	1.4408 / EN1503-1
4	BALL	CF8M / EN1503-2
5	STEM	SS316
9	END CAP	1.4408 / EN1503-1
11	BODY SEAL	GRAPHITE.
12	SEAT	RTFE.
13	THRUST WASHER	PEEK.
14	STEM PACKING	GRAPHITE.
14-1	STEM PACKING	RTFE.
15	GLAND	SS304
19	HANDLE	SS304
21	HANDLE COVER	PLASTIC
24	HANDLE NUT	SS304
29	BELLEVILLE WASHER	SS301
30	TAB WASHER	SS304
33	STOP PIN	SS304
35	BODY BLOT	SS304
37	BLOT NUT	SS304

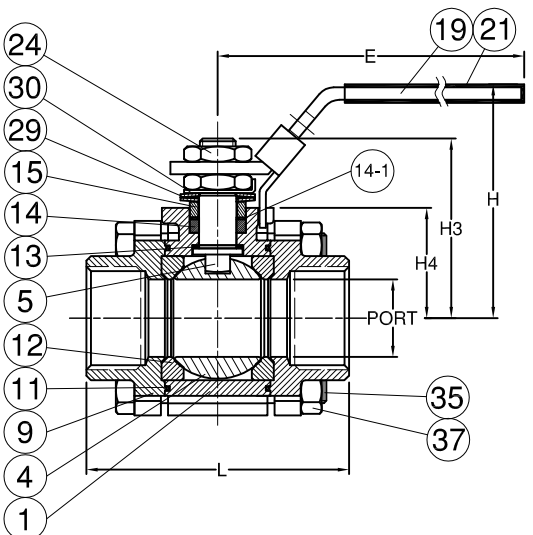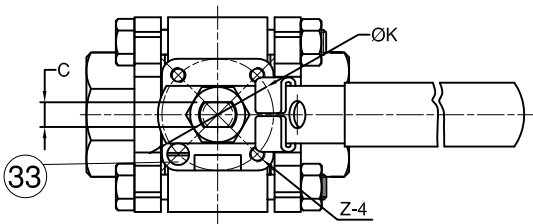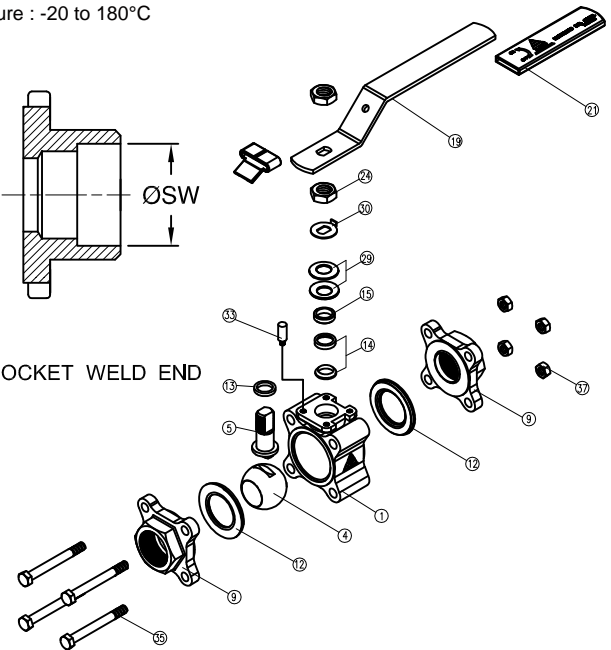

DIMENSIONS

unit:mm

SIZE	PORT	L	E	H	H3	H4	C	ØK	Z-4	L1	BW	SW	
DN15	1/2"	12.5	68.0	102.0	64.0	46.9	31.6	5.0	36.0	M5xP0.8	67.5	21.3	21.8
DN20	3/4"	15.0	71.1	102.0	64.0	46.9	31.6	5.0	36.0	M5xP0.8	71.5	26.7	27.4
DN25	1"	20.0	76.1	102.0	67.0	50.2	33.8	5.0	36.0	M5xP0.8	78.5	33.4	34.1
DN32	1-1/4"	25.0	84.6	145.0	76.0	56.0	35.5	8.0	42.0	M5xP0.8	88.0	42.2	42.7
DN40	1-1/2"	32.0	98.1	145.0	80.0	61.3	40.3	8.0	42.0	M5xP0.8	99.5	48.3	49.0
DN50	2"	38.0	111.2	162.0	92.0	75.0	46.5	10.0	50.0	M6xP1.0	108.4	60.3	61.0
DN65	2 1/2"	50.0	140.7	162.0	101.0	83.0	55.5	10.0	50.0	M6xP1.0	130.1	73.0	77.0

WORKING PRESSURE: DN15~DN25 PN140
DN32~DN65 PN100



Three Piece Screwed Fire Safe Approved Ball Valve, Reduced Bore, PN140 / 100 / 63

Fig no. V-155FS Reduced Bore
1/2" ~ 4" DN 8 - DN 105



Features :


- API 607 6th / ISO 10497-5 / BS 6755 Part II Fire Safe Approved
- Investment Casting Component
- Blow out proof stem, Anti-static Device,
- In-line Maintenance
- For Chemical, Industrial Application
- Carbon Steel or Super Alloy upon request

Standard Compliance :


- Body wall thickness : EN 12516-1/2/3
- Threaded end : BS 21 (BSP)
- BSPT
- ISO 228-1G
- DIN 2999
- ISO 7-1Rp
- Butt Weld : B16.25
- Socket Weld : B16.11
- Face to Face : MD's standard
- Body Material : EN1503-1
- Pressure testing : EN 12266

MATERIAL LIST

NO.	PART NAME	MATERIAL
1	BODY	1.4408 / EN1503-1
4	BALL	CF8M / EN1503-2
5	STEM	SS316
9	END CAP	1.4408 / EN1503-1
11	BODY SEAL	GRAPHITE
12	SEAT	RTFE.
13	THRUST WASHER	GRAPHITE
13-1	THRUST WASHER	PTFE.
14	STEM PACKING	GRAPHITE
14-1	THRUST WASHER	PTFE.
15	GLAND BUSH	SS304
19	HANDLE	SS304
20	STE SCREW	SS304
21	HANDLE COVER	PLASTIC
22	STEM NUT	SS304
23	HANDLE WASHER	SS304
28	STOP PLATE	SS304
29	BELLEVILLE WASHER	SS304-CSP
30	TAB WASHER	SS304
35	BODY BLOT	SS304
37	BLOT NUT	SS304




2-1/2" CAP END




3"~4" CAP END

Specification :



- End connection : Threaded end, Socket weld end, Butt weld end
- Working Pressure : 140 Bar (CWP) / 2000 PSI for DN8 - 25
- 100 Bar (CWP) / 1500 PSI for DN32 - 65
- 63 Bar (CWP) / 1000 PSI for DN80 - 105
- Temperature : -20 to 180°C



BUTT WELD END



SOCKET WELD END

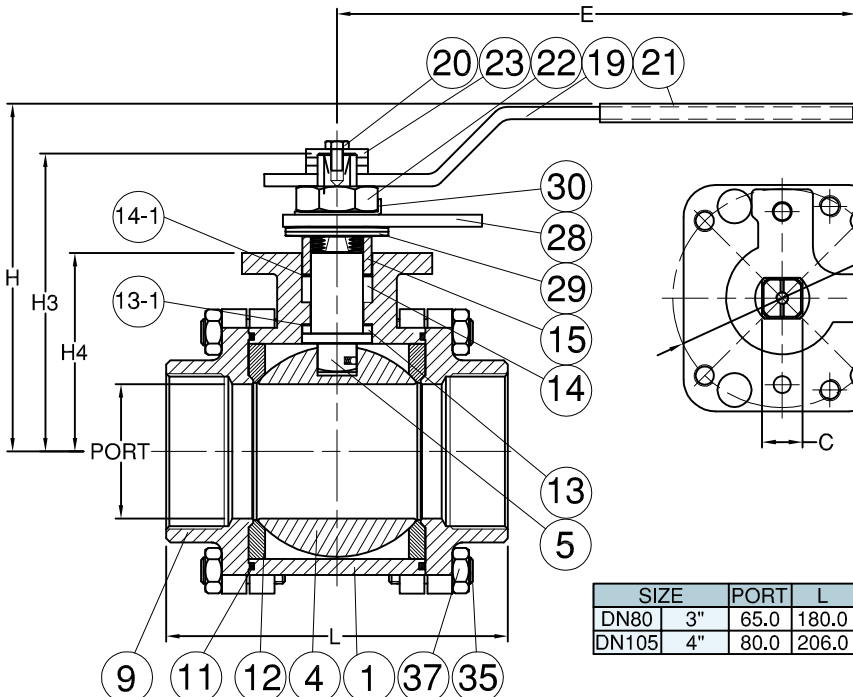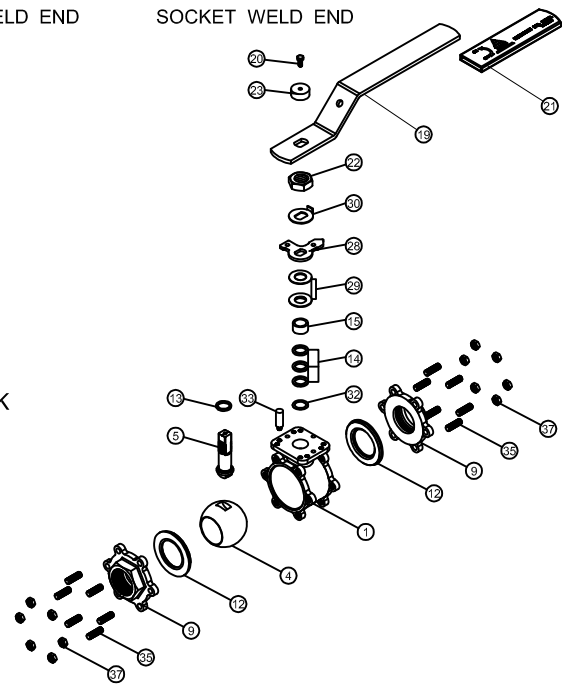

DIMENSIONS

unit:mm

SIZE	PORT	L	E	H	H3	H4	C	ØK	Z-4	L1	SW	BW	
DN80	3"	65.0	180.0	265.0	168.0	144.0	96.0	18.9	102.0	M10xP1.5	170.7	90.2	89.0
DN105	4"	80.0	206.0	265.0	176.6	152.6	104.5	18.9	102.0	M10xP1.5	190.5	115.5	114.3